

Control Panel	Value		Jumper	
	EOL	Alarm	EOL	Alarm
Honeywell (Ademco/Microtech)	1k	1k	A	1
Cooper (Scantronic, Menvier, Texecom, Pyronix, Castle)	2k2	4k7	B & C	2
Siemens, Aritech, HKC	4k7	4k7	C	2
RISCO (Gardtec)	4k7	6k8	C	3
Guardall	4k1	4k1	B	2 & 4
DSC	5k6	5k6	D	3 & 4
Inner Range	2k2	6k8	B & C	3



**Description:**  
Grade 3 Shock / Motion Sensor.

**Materials:**  
ABS

**ENVIRONMENTAL CLASS: II**

**STANDARDS MET:**  
EN50131-1 PD6662:2010

**OPERATING CONDITIONS:**  
**Input:** 10V-15V – nominal 12V  
**Quiescent current draw at 12V:** 9mA  
**Maximum current draw at 12V:** 15mA


**Resistor Combinations:**  
See Inset Panel

**Colours:**  
White (No Suffix)  
Brown (Suffix B)

**Fixings:**  
Mounting & Fixing Screws Provided

**Description:** SEISMO is a sensor for detecting vibration, motion or either of both inputs. It requires a DC supply of 10v-15v (nominal 12v) power supply to function. SEISMO functions on a fully supervised EOL loop but can also be fitted for a 4 wire installation.

**Installation:** Please see install sheets.

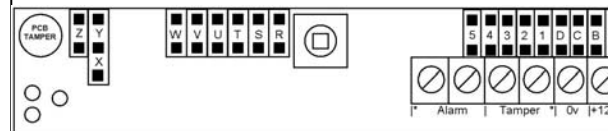

Drawing of Seismo PCB

**KNIGHT**  
FIRE & SECURITY PRODUCTS LTD  
<mailto:info@knightfireandsecurity.com>

Unit 84 Seawall Road Ind. Estate  
Cardiff UK CF24 5TH  
Tel: 0 (00 44) 29 20 48 81 29  
Fax: 0 (00 44) 29 20 48 91 32

Drawing No: **SEISMO**  
Drawn: *Kevin James*  
Date: *01/08/2013*

All units in mm  
Do not scale



© Knight Fire & Security Products Ltd  
All cases of TM Infringement will be pursued.