

DESCRIPTION

Large 20 way (18+2) junction box with tamper
Security Grade 3
Environmental Class 2

TERMINALS & CABLE ENTRY

20 wire clamping terminals on PCB
Opposing terminals can be linked via shunts on PCB
2 terminals dedicated to tamper switch
8 rear cable entry holes (1 each corner, 2 each end)
4 end knock outs (2 each end)


TAMPER

TACT microswitch tamper with spring for detection of lid removal

MATERIALS

Moulded ABS plastic casing
Adhesive pad (PCB fixing)

PCB DIAGRAM

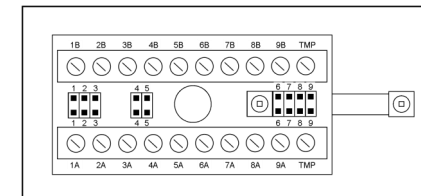

TEMPERATURE RANGE

-40 to +85 degrees Celsius

ELECTRICALLY RATED AS FOLLOWS

Max 125 Volts DC, 230 Volts AC
3 Amps AC



KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
Cardiff UK CF24 5TH
Tel: +44 (0) 2920 488 129
Fax: +44(0) 2920 489 132

Drawing #: J21
Drawn: Gareth Carpenter
Date: 01/04/2015
Revision: 1

All dimensions in mm
Do not scale



© Knight Fire & Security Products Ltd
All cases of infringement will be pursued.